



REISSdisplay

[www.reissdisplay.com](http://www.reissdisplay.com)



# STADIUM LED DISPLAY

PROFESSIONAL MANUFACTURER

QUALITY MAKES THE FUTURE



A

## The business philosophy is :

Attentive service, integrity first.

B

## The team concept is:

The goal is clear, unswerving, not abandoning, no abandoning, no giving up.

Passed CCC China 00 National Compulsory Product Certification  
Passed FCC certification, passed CE certification

Passed RoHS certification, passed energy-saving certification, and passed rigorous testing by third-party authoritative organizations: qualified pressure test, high and low temperature test, harmonic current test, voltage fluctuation test, flicker test, vibration test

# Cabinet advantage

best service

Hybrid module: can use perimeter as well as rental screen



RGB



All in one



waterproof IP65



Energy saving



Easy maintenance



Large perspective



Wireless control



C-GSS



Adjustable brightness



Safety



## ▲ Swivel design with wheels for emergency exit

With swivel base and wheels for emergency exit for the installation of perimeter LED display in the stadium. This is necessary for a quick and easy getaway required by most football associations.



power & data connectors

side lock

cabinet lock


Waterproof protection cover

bracket and box parallel



## ▲ Multi-angle adjustable

Multi-angle, wide viewing angle, suitable for camera shooting, more meet the needs of audiences.  
Angle: 60°C, 70°C, 80°C, 90°C




## ▲ Protective top cover and rubber module mask

The protective top cover protects the player from harm. The rubber module mask protects the spherical LEDs and eye-catching players and prevents further injuries to the players



Cabinet: 960x960mm

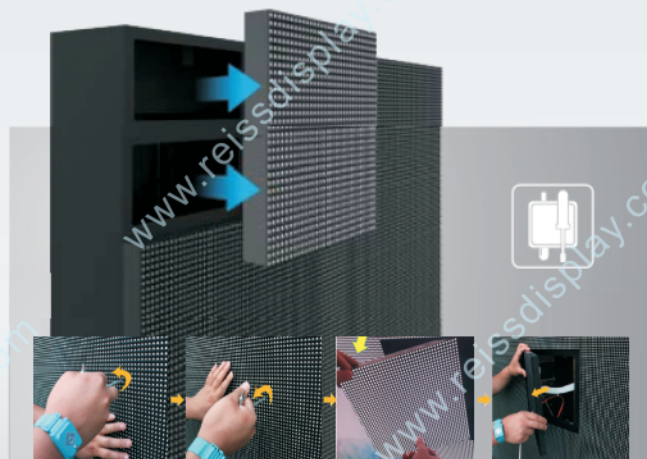

## Front & rear access


The smart mechanic design inside the module makes front & rear access can be achieved at the same time.

| Outdoor LED display             | Technical Parameter                                      |                          |                          |                          |                         |
|---------------------------------|----------------------------------------------------------|--------------------------|--------------------------|--------------------------|-------------------------|
| Item                            | P5                                                       | P6                       | P8                       | P10                      | P16                     |
| Pixel Pitch                     | 5mm                                                      | 6mm                      | 8mm                      | 10mm                     | 16mm                    |
| LED Type                        | SMD 2727                                                 | SMD 3535                 | SMD 3535                 | SMD 3535                 | SMD 3535                |
| Pixel Density                   | 40000dots/m <sup>2</sup>                                 | 27777dots/m <sup>2</sup> | 15625dots/m <sup>2</sup> | 10000dots/m <sup>2</sup> | 3906dots/m <sup>2</sup> |
| Pixel Configuration             | 1R1G1B                                                   |                          |                          |                          |                         |
| Module Dimension (W x H)mm      | 320x160                                                  | 192x192                  | 256x128                  | 320x160                  | 256x256                 |
| Module Resolution (W x H)mm     | 64x32                                                    | 32x32                    | 32x16                    | 32x16                    | 16x16                   |
| Cabinet Dimension (W x H x D)mm | 960x960x150                                              | 960x960x150              | 1024x1024x150            | 960x960x150              | 1024x1024x150           |
| Cabinet Resolution (W x H)mm    | 192x192                                                  | 160x160                  | 128x128                  | 96x96                    | 64x64                   |
| Screen Weight                   | 40kg/m <sup>2</sup>                                      | 40kg/m <sup>2</sup>      | 45kg/m <sup>2</sup>      | 40kg/m <sup>2</sup>      | 45kg/m <sup>2</sup>     |
| Viewing Angle                   | 140°/140°                                                |                          |                          |                          |                         |
| Best Viewing Distance           | 5-100m                                                   | 6-100m                   | 8-160m                   | 10-170m                  | 16-200m                 |
| Brightness(cd/m <sup>2</sup> )  | ≥5000 — ≥7000nits                                        |                          |                          |                          |                         |
| Gray Scale                      | ≥14bit                                                   |                          |                          |                          |                         |
| Colour                          | full color                                               |                          |                          |                          |                         |
| Color Temperature               | 5500-8000k                                               |                          |                          |                          |                         |
| Refresh Rate(Hz)                | 3840Hz                                                   |                          |                          |                          |                         |
| Contrast Ratio                  | ≥2000:1                                                  |                          |                          |                          |                         |
| Power Supply                    | AC100-240V                                               |                          |                          |                          |                         |
| Storage Temp                    | -40°C ~ +65°C                                            |                          |                          |                          |                         |
| Operation Temp                  | -20°C - +50°C                                            |                          |                          |                          |                         |
| Operation Humidity              | 5% ~ +95%RH                                              |                          |                          |                          |                         |
| Input signal                    | DVI/VGA,RGBHV,CompositeVideosignal, S-VIDEO, YPbPr(HDTV) |                          |                          |                          |                         |
| Driving Method                  | 1/8dynamic                                               | 1/8dynamic               | 1/5dynamic               | 1/4dynamic               | 1/2dynamic              |
| Max. Power Consumption          | 800W/m <sup>2</sup>                                      | 800W/m <sup>2</sup>      | 500W/m <sup>2</sup>      | 450W/m <sup>2</sup>      | 600W/m <sup>2</sup>     |
| Avg. Power Consumption          | 400W/m <sup>2</sup>                                      | 300W/m <sup>2</sup>      | 280W/m <sup>2</sup>      | 250W/m <sup>2</sup>      | 350W/m <sup>2</sup>     |
| Protection class                | Ip65                                                     |                          |                          |                          |                         |
| Maintenance method              | front maintenance                                        |                          |                          |                          |                         |
| Installation                    | Inlaid type, seat-mounted type, column type, etc.        |                          |                          |                          |                         |


Multiple cabinet options:



## Product component:

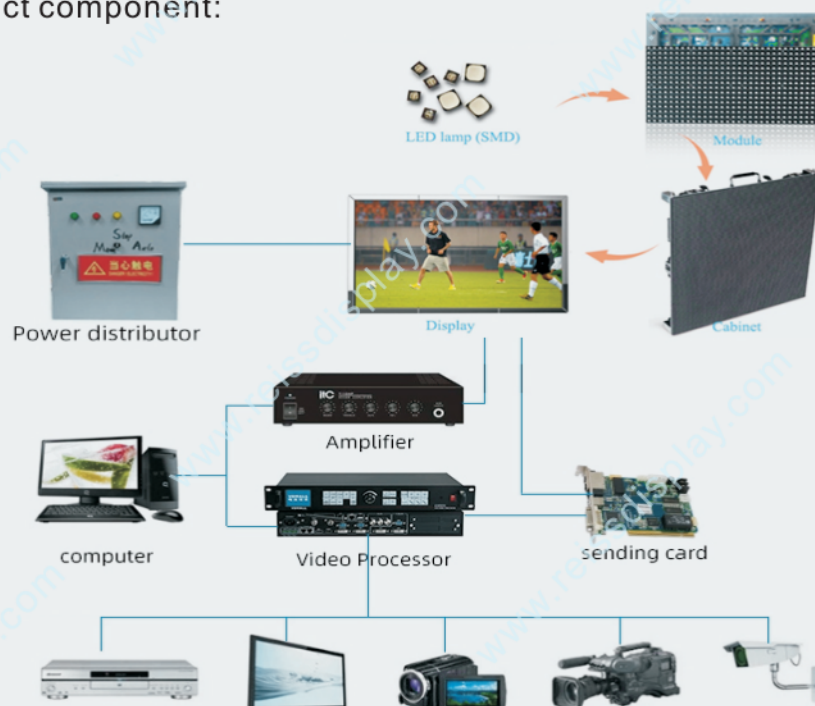

## Backup for recycling:

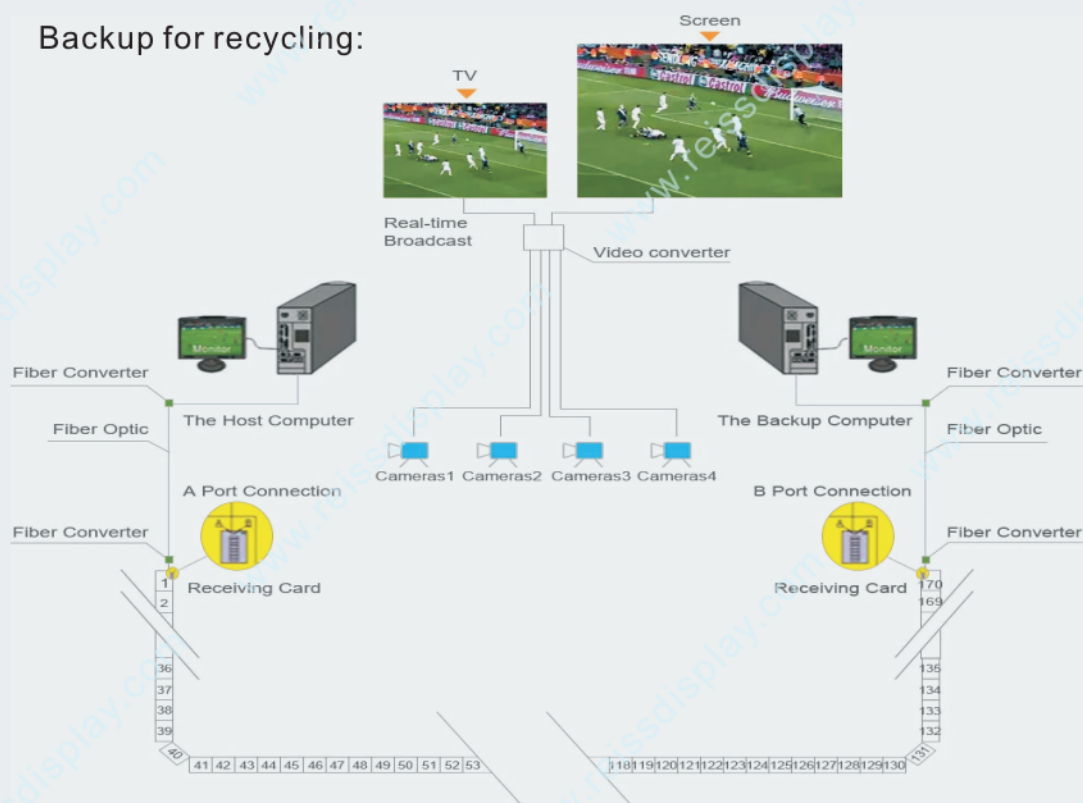

# Part of the case

best service



Project: Indoor Stadium  
Product number: P10  
Screen size: 300m<sup>2</sup>  
Time: 2017



Project: Outdoor Stadium Perimeter  
Product number: P12  
Screen size: 296m<sup>2</sup>  
Time: 2017



# Part of the case

best service



Project: Indoor Stadium  
Product number: P10  
Screen size: 700m'  
Time: 2017



Project: Outdoor Stadium Perimeter  
Product number: P8  
Screen size: 520m'  
Time: 2017





HIGH-END LED DISPLAY SOLUTION PROVIDER

**THANKS**

WE ARE THE BEST CHOICE



[sales@reissdisplay.com](mailto:sales@reissdisplay.com)



<http://www.reissdisplay.com>